

Universal Loop Through and Individual Sockets

- Easy mounting with screws or clamps for flush-and surface mounting.
 - Zinc plated alloy housing for excellent corrosion protection and grounding.
 - High selectivity and low loss TV/Satellite separating filter.
 - Outputs : Socket for RF, plug for TV both to IEC 60169-2, F-socket for satellite.
 - Connecting system for inner conductor 0.8-1.3 mm and outer conductor up to 5.5mm.
 - With DC passage through SAT output.
 - The sockets are suitable for all flush mounting boxes (58 mm).
 - The cover plate is part of the scope of supply.
- با قابلیت نصب آسان از طریق پیچها و چنگکها در کلیه حالات توکار و روکار.
 - بدنه دایکاست دارای پوشش روی جهت جلوگیری از خوردگی و اتصال زمین مناسب.
 - دارای فیلتر جداکننده TV/SAT با افت کم و منحی عبور مناسب برای هر باند.
 - شامل اتصال F جهت خروجی SAT و اتصال IEC جهت خروجی TV و Rd.
 - قطر داخلی اتصالات با احتساب مغزی فیش 0.8-1.3mm و قطر بیرونی آن تا 5.5mm می باشد.
 - با قابلیت عبور ولتاژ DC در خروجی SAT و خروجی عبوری FO314.
 - قابل نصب در تمام قوطی های توکار پریز طبق استاندارد (58mm).
 - درب پوش پریز در بسته بندی محصول می باشد.




MATV & CATV Antenna Outlets

5-1000 MHz

TV / Radio پریزهای آنتن مرکزی ۲ خروجی

- Screening factor : Class A
- Single Packing.

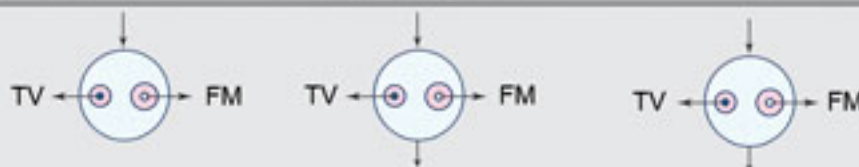

Cover Plate



Mounting Fram

Model			FO2		FO7		FO12	
Frequency range	MHz		Radio dB	TV dB	Radio dB	TV dB	Radio dB	TV dB
Thru. loss	5-40	AM	—	—	1.9	—	2.2	—
	47-68	VHFI	—	—	1.8	—	2.2	—
	87.5-108	FM	—	—	1.8	—	2.2	—
	174-470	VHFIII	—	—	2.0	—	2.3	—
	470-862	UHF	—	—	2.2	—	2.6	—
Side loss	5-40	AM	0.3	—	—	7.5	11.3	10.4
	47-68	VHFI	—	1.5	—	6.5	11	10
	87.5-108	FM	1.5	—	7.5	—	11	10
	174-470	VHFIII	—	2	—	6	10.7	10
	470-862	UHF	—	2	—	6	11	10.3

